

DATA SHEET BOUNCER XSMALL

Text for invitation to tender | Item No: 51 4814 xx1



MATERIALS | SCOPE OF SUPPLY

Bouncing element fully assembled for installation

Basic frame:	steel hot dip galvanized
Jumping surface:	plastic slats
Cover:	safety slabs
Equipment:	lifting hook, 4 pieces

SAFETY AND USER NOTES

- No somersaults, belly and back jumps
- No food / beverage
- No alcohol / drugs
- No jewellery
- Wear shoes with flat sole
- Use only spare parts from the manufacturer

INSTALLATION

Pit with drainage layer


Installation according to our detailed mounting instructions, see www.stilum.com

TECHNICAL INFORMATION

Dimensions:

Main dimension:	1420 x 1420 mm
Jumping surface:	940 x 940 mm
Weight:	190 kg (incl. pallet)
Test load:	510 kg
Dimensions largest piece:	1420 x 1420 x 433 mm

Max. fall height:	1000 mm
Free space:	3940 x 3940 x 3500 mm
Impact area:	19,54 m ²
Required safety slabs:	19,25 m ²
Required lawn grating:	24,00 m ²
Surface material:	acc. to EN 1176-1

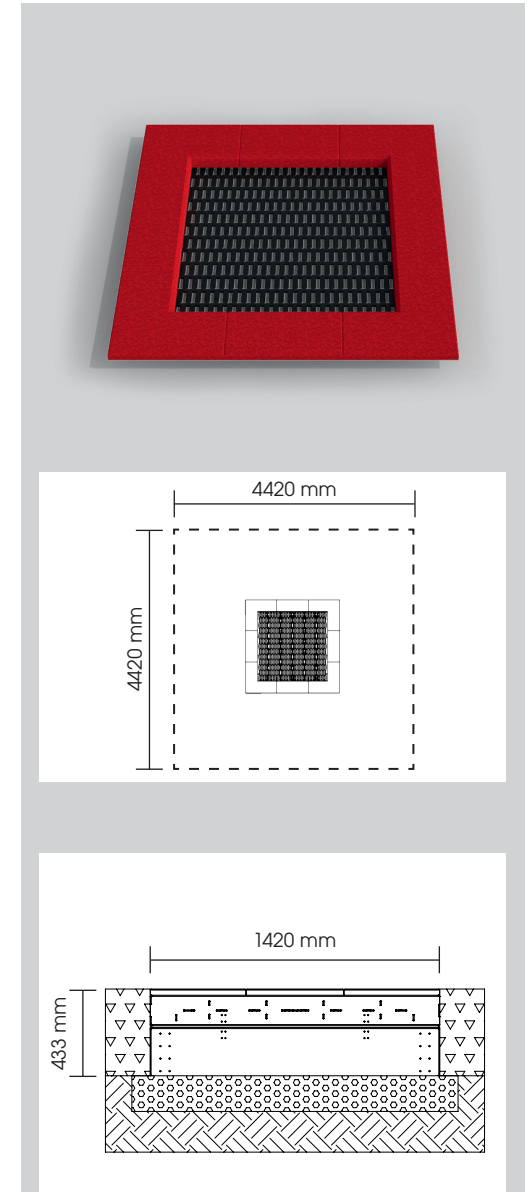

from 3 years	User: 1 Child	DIN EN 1176		
Colour key (according to part 7 and 8 of item number)				
-31x signal yellow	-32x signal green	-34x signal red	-23x blue	-26x black