

DATA SHEET CALISTHENICS

Text for invitation to tender | Item No: 55 1520 401



MATERIALS | SCOPE OF SUPPLY

Fitness equipment, final installation on location

Posts: stainless steel, V2A coated,
4 pieces

Tubular frames: stainless steel, V2A,
8 pieces

Pipe connector: aluminium, coated,
2 pieces

Foundation plates: steel, coated

Instruction sheet: to be ordered separately,
stainless steel, aludibond
1 piece

TECHNICAL INFORMATION

Dimensions:

Main dimension: 4700 x 4450 mm

Height: 2550 mm

Weight: 375 kg

Capacity: acc. to normative
requirements



Max. fall height: 1350 mm

Movement area: 57,35 m²

Required safety slabs: 60,00 m²

Required lawn grating: 64,00 m²

Recommended
surface material: synth. impact protection
grass is not allowed

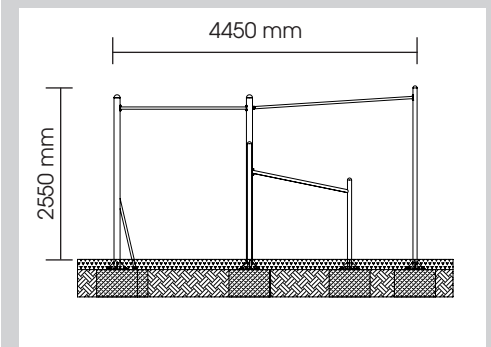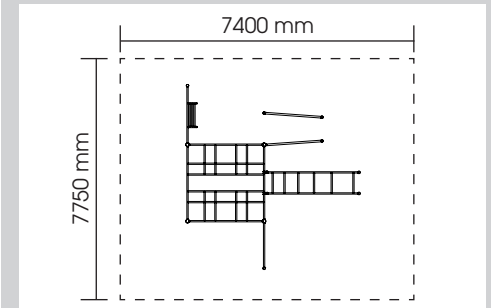

INSTALLATION

Foundations: 6

Installation according to our detailed mounting instructions, see www.stilum.com

