

DATA SHEET CALISTHENICS

Text for invitation to tender | Item No: 55 1520 402

MATERIALS | SCOPE OF SUPPLY

Fitness equipment, final installation on location



Posts:	stainless steel, V2A coated, 4 pieces
Tubular frames:	stainless steel, V2A, 8 pieces
Pipe connector:	Aluminium, coated, 2 pieces
Foundation plates:	steel, coated
Instruction sheet:	to be ordered separately, stainless steel, aludibond 1 piece

TECHNICAL INFORMATION

Dimensions:

Main dimension:	4700 x 4450 mm
Height:	2550 mm
Weight:	400 kg
Capacity:	acc. to normative requirements

Max. fall height:	1350 mm
Movement area:	57,35 m ²
Required safety slabs:	60,00 m ²
Required lawn grating:	64,00 m ²
Recommended surface material:	sand, gravel, wood chip, synth. impact protection grass is not allowed

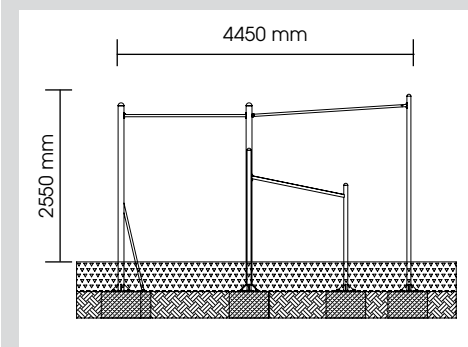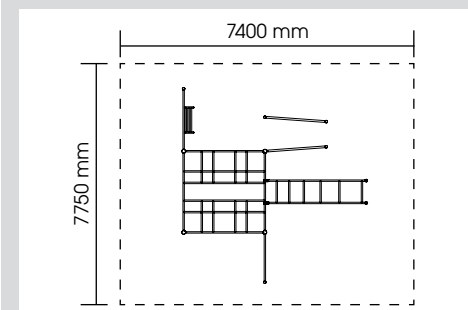

INSTALLATION

Foundations: 6

Modified installation depth possible
(special edition)

Installation according to our detailed mounting
instructions, see www.stilum.com

