



Terrasoft® EPDM Cylinder



Very minimalist, classic and simple - the design language of the Terrasoft cylinder is sure to delight city planners! The extensive EPDM colour range enables individual surface design that appeals to young and old alike. Wonderful meeting areas can be created in an urban environment! Several elements also allow for numerous balance and play variations. The Terrasoft cylinder offers a pleasantly soft and warm seat in summer and winter. While this design element can be used to give public spaces an optical spatial arrangement, it's often also used to visually frame paths and squares.

ADVANTAGES


- Quick and easy installation
- Low maintenance
- Robust
- Design element for inner-city areas
- Attractive seating
- Play element

APPLICATION

The Terrasoft EPDM cylinder can be used in numerous areas, for example as a barrier for driveways and paths or to provide seating in public places. Several cylinders are used to create unique balance courses and imaginative play combinations.



with Floor anchor
Item no. 2565000109

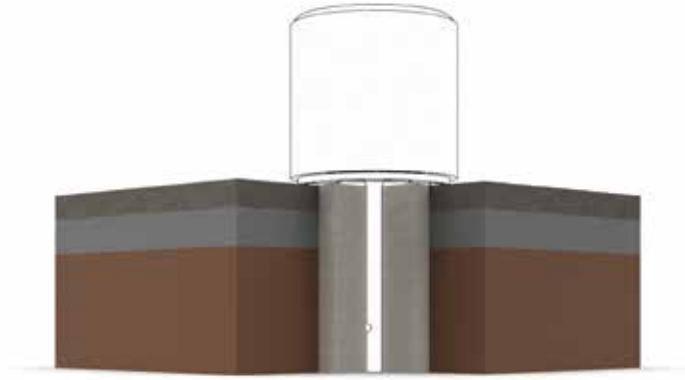

Cylinder embedded in concrete by means of the floor anchors.

INSTALLATION INSTRUCTIONS

Cylinder without floor anchors

are placed on the existing surface and glued to it according to the gluing instructions.

Cylinder with floor anchors

can be embedded with the ground anchors into the prepared concrete foundations to fix them permanently.

GLUING

Preparation of the subsoil

Before installing, the subsoil must be compressed and fixed. Please pay attention that the adhesion areas are free from oil, grease and other residues e.g. colour, rubber adhesion, etc.

Preparation of the cartridge

Push the membrane in to the threaded piece and screw on the cut-to-size plastic nozzle. Then remove the bottom plate of the cartridge with a screw driver and insert the cartridge by hand or with a compressed air pistol.

The adhesion follows on a complete cleaned subsoil with gluing points on the bottom of the Cylinder.

The surface and environment temperature must be at least 5°C. The Cylinder should only be installed in dry weather conditions. Adhesive cartridges should not be stored under 10°C.

Please pay attention that the Cylinder is not moved for 48 hours.

Colours



-31x signal- yellow	-32x signal- green	-34x signalred	-30x orange	-23x blue	-26x black
---------------------------	--------------------------	-------------------	----------------	--------------	---------------

Specifications

