

Mounting instructions for multiplay „gravis 1A“

Item-No. 51 5519 401


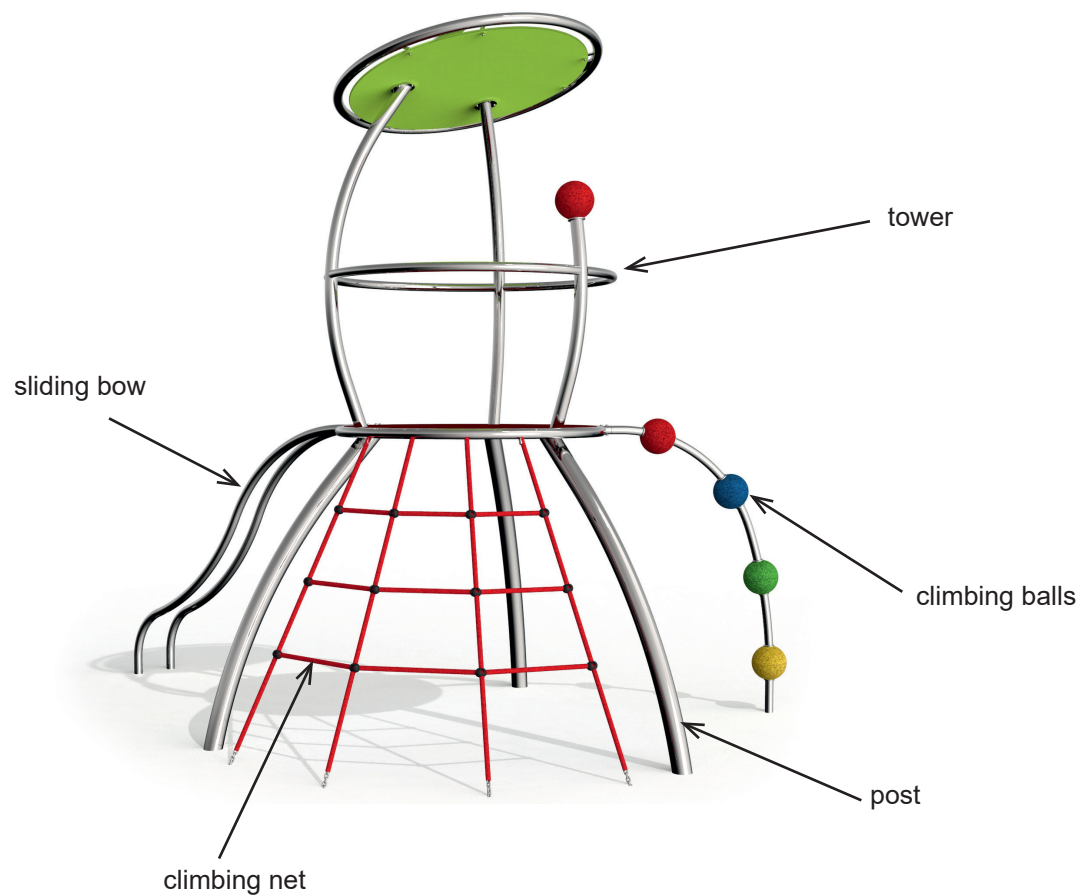


Diagram 1: Overall view of the play equipment

Mounting instructions for multiplay „gravis 1A“

Item-No. 51 5519 401

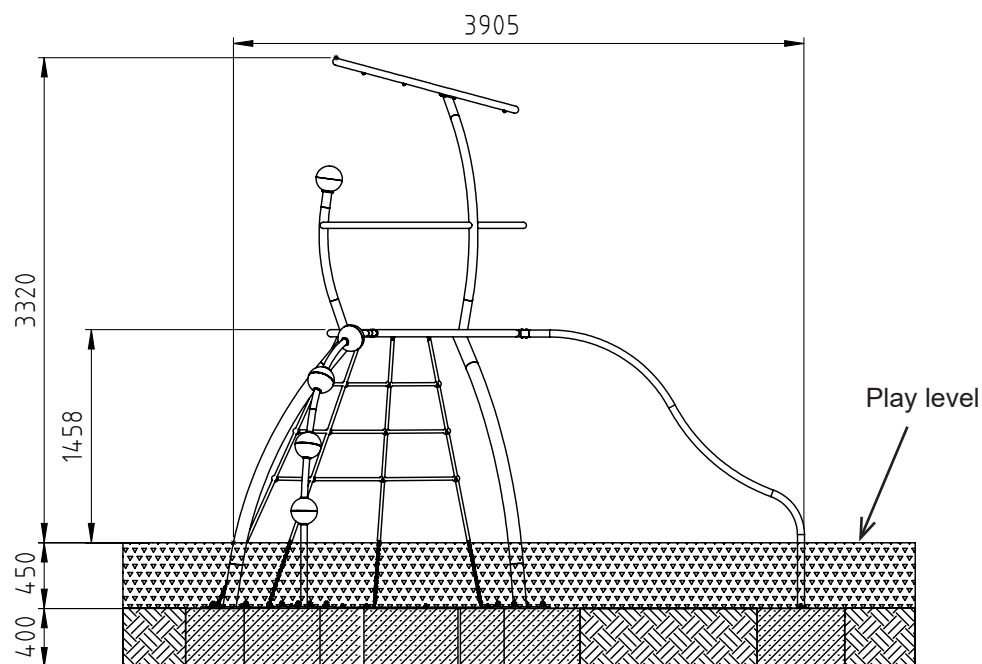

Legende

 stoßdämpfender Boden
shock-absorbing floor

 Beton
concrete

 gewachsenes Erdreich
natural ground

Diagram 2a: Foundation plan

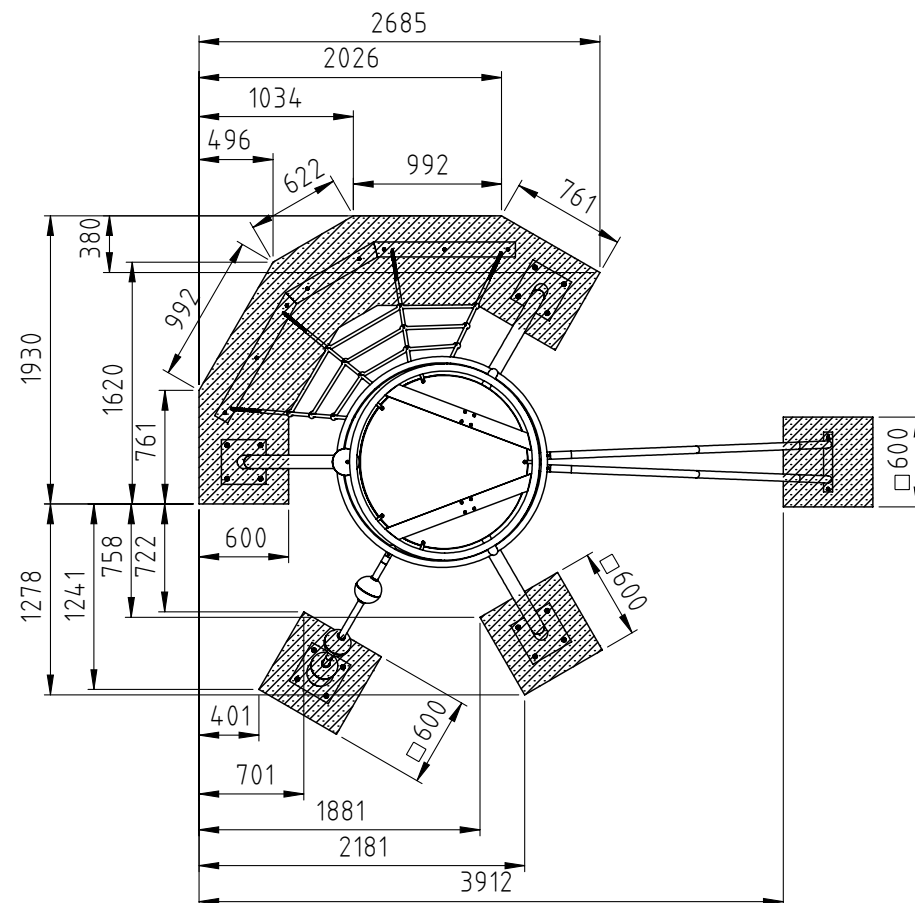


Diagram 2b: Foundation plan top view

Mounting instructions for multiplay „gravis 1A“

Item-No. 51 5519 401

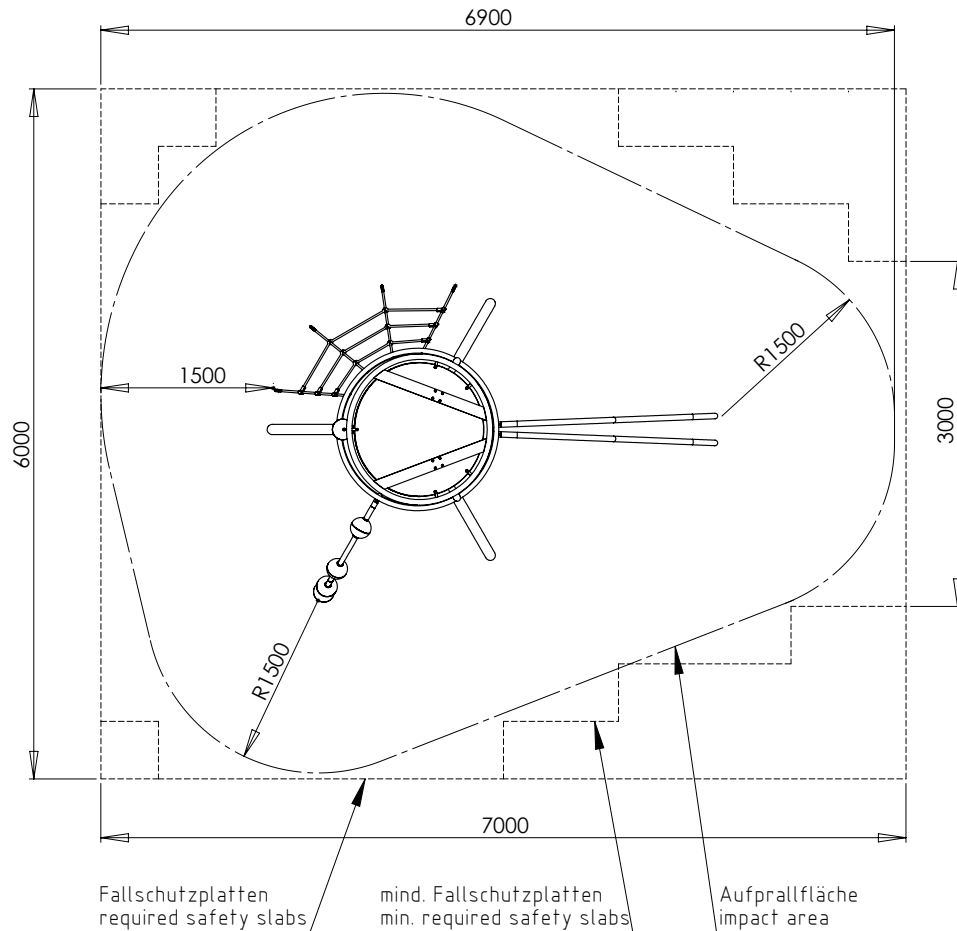


Diagram 3: Top view

1. Select the location of the play equipment taking into account the required minimum space (see diagram 3).
2. Carry out excavation work for foundations as shown in diagram 2a and 2b. After excavation compress the foundation floor.
Note: The play equipment is installed at play level.
Pay attention to items marked „play level“ at play equipment!
3. Set up the foundations acc. to diagram 2a and 2b with central, horizontal reinforcement.

Reinforcement plan:

Concrete foundation with reinforcement

Foundation: BSt 500S

Stirrups Ø 8 mm lengthwise and cross

Concrete cover $h' = 3$ cm

Concrete quality class C 25/30

4. After a setting period of 10 – 14 days, depending on weather conditions and foundation size, fill up and compress the holes between the foundation and the foundation hole with excavation.
5. Clean the foundation surface. Connect the platform to the posts according to diagram 1, 4 and 5 and fix the parts using the screws including in the delivery.
6. Align the tower on the foundation as shown in diagram 1, 2a and 2b.
Note: Do not screw the base plates onto the foundations yet!

Mounting instructions for multiplay „gravis 1A“

Item-No. 51 5519 401

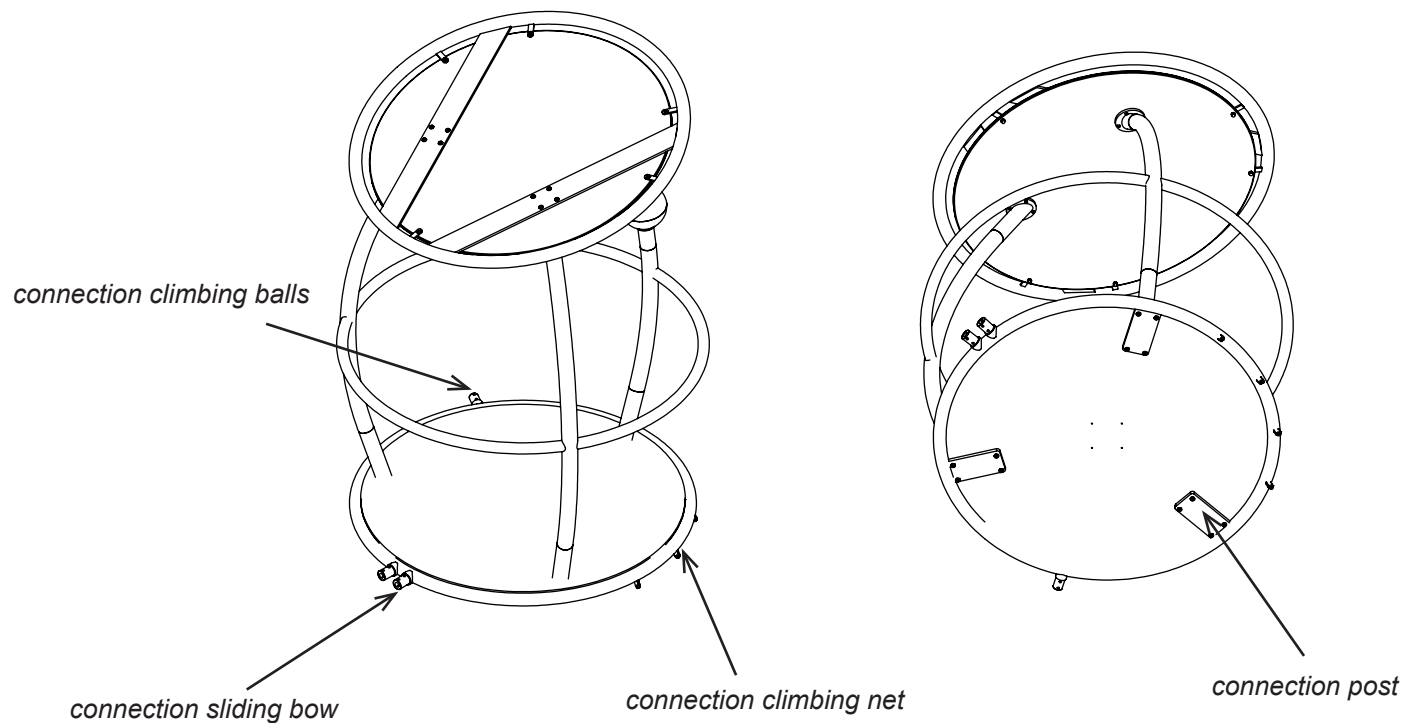


Diagram 4: Platform

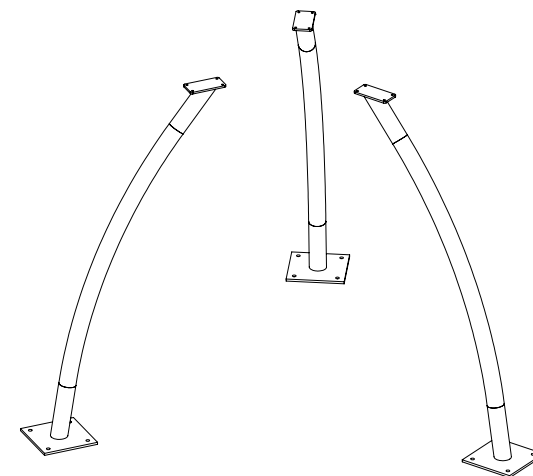


Diagram 5: Posts

Mounting instructions for multiplay „gravis 1A“

Item-No. 51 5519 401

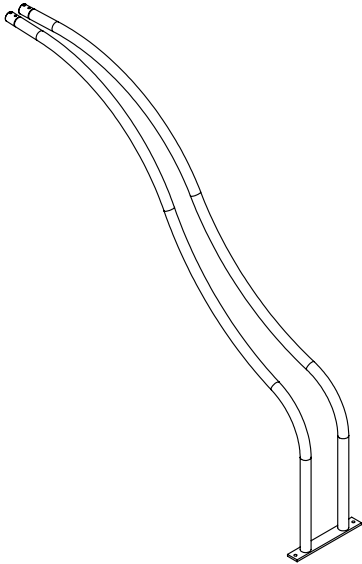


Diagram 6: Connection part sliding bow




Diagram 7: Connection part climbing balls

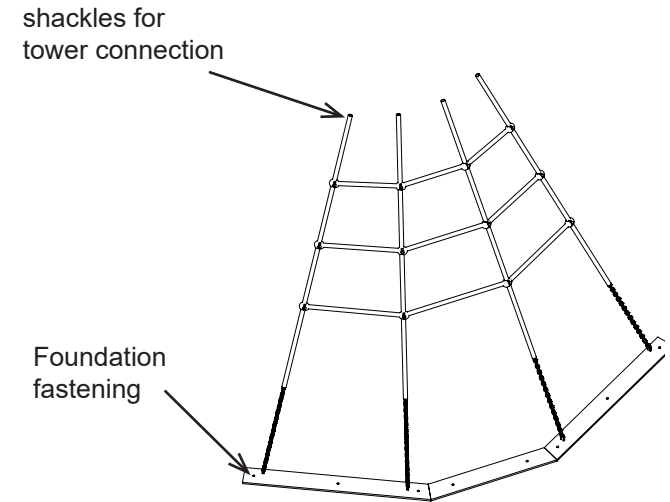


Diagram 8: Connection part climbing net

7. Connect the modules (sliding bow, climbing balls) with the tower at the intended locations acc. to the diagram 1 and 4. Please fasten the parts using the screws including in the delivery.
8. Connect the climbing net with the tower at the intended locations acc. to the diagram 1, 4 and 8 and place the foundation plate on top of the foundation (diagram 2b). Please fasten the parts using the shackles including in the delivery.
9. Align the play equipment once more on the foundations.
Note: The climbing net should be placed with tension to avoid droop.
10. Drill holes into all foundations and screw the play equipment to the foundations using the included heavy-duty dowels.
11. Cover the entire impact area with fall protection according to the required drop height in accordance with EN 1176-1.
Critical drop height: 1500 mm.
Recommended surface material: sand, wood chip, gravel, synth. impact protection.
With a smaller installation depth (special edition) we recommend synthetic impact protection. In this case, make sure that protruding parts (e.g. screws, gusset plates) are covered with appropriate fall protection.
12. Do not allow children to use the equipment before the installation has been finished.

Mounting instructions for multiplay „gravis 1A“

Item-No. 51 5519 401



Attention: If the play equipment has been incompletely installed or partly dismantled when carrying out maintenance and repair work, this may lead to particular risks of injury for the user. For this reason, make clearly visible that the equipment shall not be used in such cases.

NOTE: Play equipment, which contain components made of stainless steel should not come with „normal“ steel parts in contact. Those steel parts may rub off and leave small steel particles in combination with moisture brown rust stains. If such corrosion occur on stainless steel parts, they are fine to remove with an abrasive (240 grit).

Please take care when transporting and setting up the fact that the components are made of stainless steel with no „normal“ steel parts in contact.

In order to preserve a good visual appearance of your stilum playground equipment over a long period one should take care of maintenance of the stainless surface even despite of their corrosion resistance.

Especially areas, which can not be reached by rainfall, should be frequently cleaned from dirt and deposits due to air pollution and dirt caused by the atmosphere. Light soiling can easily be removed by using a high pressure cleaner.

For persistent deposits use a clean cloth moistened with a special liquid cleaner (e.g. on phosphoric acid) and rinse off with clear water after a short application time. During cleaning with mild abrasive components, only wipe over stainless steel surface in polishing direction.

For heavily soiled surfaces, polishes can be used (e.g. for cleaning chrome on cars) or for greasy and oily dirt alcoholic cleaning agents and solvents (e.g. ethyl alcohol, isopropyl alcohol or acetone).

However, it should be noted that the dissolved soiling is not spread over the surface again.

Do not use any chloride or hydrochloric containing cleaning products nor scouring powder, bleaching - or silver polish cleaner. Cleaning intervals depend on type and degree of soiling as well as on demands made on optical characteristics. Therefore cleaning is advisable at intervals of six to twelve months – whereby in

the case of strong soiling it is appropriate to clean the playground equipment at intervals of three to six months.