

DATA SHEET MULTIPLAY GRAVIS 3

Text for invitation to tender | Item No: 51 5519 431





MATERIALS | SCOPE OF SUPPLY

Climbing equipment, final installation on location	
Tower:	stainless steel, V2A, with steel plateau which surface is made of EPDM granules, and roof made of HDPE panel, 3 pcs.
Post:	stainless steel, V2A, 9 pcs.
Climbing net:	Herkules rope/plastic, 1 pc.
Climbing balls:	stainless steel, V2A, with 4 balls made of EPDM granules, 1 pc.
Layaway bow:	stainless steel, V2A with 12 caps made of plastic, 2 pcs.
Climbing eye:	stainless steel, V2A, 1 piece
Climbing wall:	stainless steel, V2A, with 2 HDPE panels, 2 pieces
Wobble bridge:	Herkules rope/plastic/wood, 2 pieces
Parallel bars slide:	stainless steel, V2A, 1 piece
Slide:	stainless steel, V2A, 1 piece
Caps:	plastic, 2 pieces
Decoration ball:	EPDM granules, 7 pieces
Foundation plates:	steel, coated

TECHNICAL INFORMATION

Dimensions:	
Main dimension:	12565 x 10070 mm
Height:	3320 mm
Weight:	1400 kg
Capacity:	acc. to normative requirements
Dimension largest piece:	Ø1410 x 1900 mm
Heaviest piece:	185 kg
Max. fall height:	2200 mm
Impact area:	109,30 m ²
Required safety slabs:	min. 122,80 m ² (□168,00 m ²)
Required lawn grating:	min. 147,00 m ² (□168,00 m ²)
Recommended surface material:	sand, wood chip, gravel, synth. impact protection

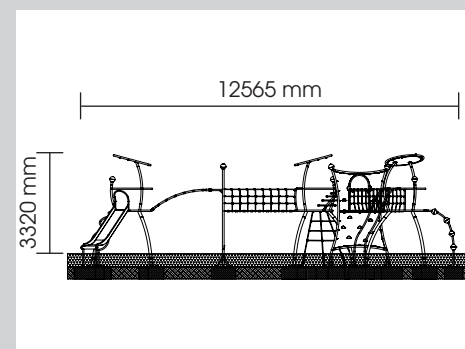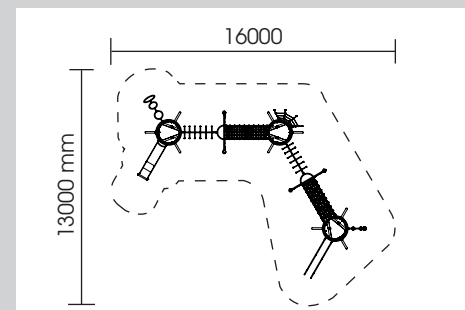

INSTALLATION

Foundations: 16

Installation according to our detailed mounting instructions, see www.stilum.com

