



Terrasoft®

Seesaw softener



The Terrasoft seesaw softener was developed to cushion the impact at the ends of the seesaw. It consists of pure rubber granules and impresses with its damping properties. Excessive erosion of the topsoil at the impact point of the seesaw is avoided. The Terrasoft seesaw softener is available in three attractive colours. With the help of the integrated mounting tube, the element is installed in a concrete foundation and permanently fixed.

ADVANTAGES

- Cushioning the impact on the seesaw end
- simple installation
- low maintenance
- It prevents erosion with the upper soil

APPLICATION

The Terrasoft seesaw softener is installed under seesaws according to the installation instructions opposite.


Colours



-10x redbrown
-12x green
-13x anthracite

Specifications



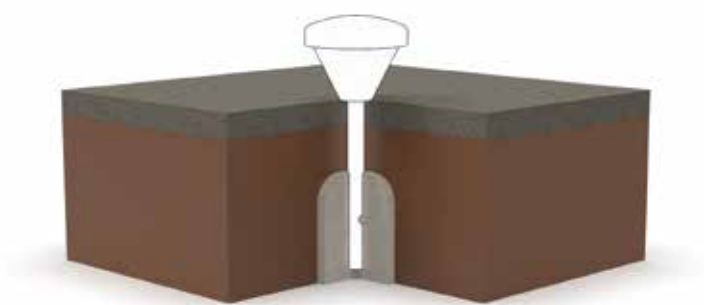

The Terrasoft Seesaw softener is fixed into a small concrete foundation.

INSTALLATION INSTRUCTIONS

A floor anchor is integrated into all Terrasoft seesaw softener. This is recessed into a concrete foundation, so achieving maximum stability.

Please note that the seesaw softener is only to be installed on a solid underground.

Installation information:

Select the location. Carry out excavation work for the foundation. Place Seesaw softener into the foundation and support during the drying time. After the setting time of 8 – 10 days, depending on weather conditions and foundation size, seal the foundation with the safety cover required for the height of fall indicated. Do not allow children to use the equipment before the installation has been finished.

MAINTENANCE INSTRUCTIONS

Periodic inspection

Visual inspection:

visual and functional check: Detection of obvious safety hazards

Operational inspection:

quarterly wear control, Check the equipment for cleanliness, correct functioning, wear, stability and damages. Check all the fixing elements and retighten them if necessary. In case of damages, replace the damaged elements.

Main inspection:

annual intensive inspection

