


# Maintenance instructions for climbing equipment „pyramis 1“

Item No. 51 6525 401

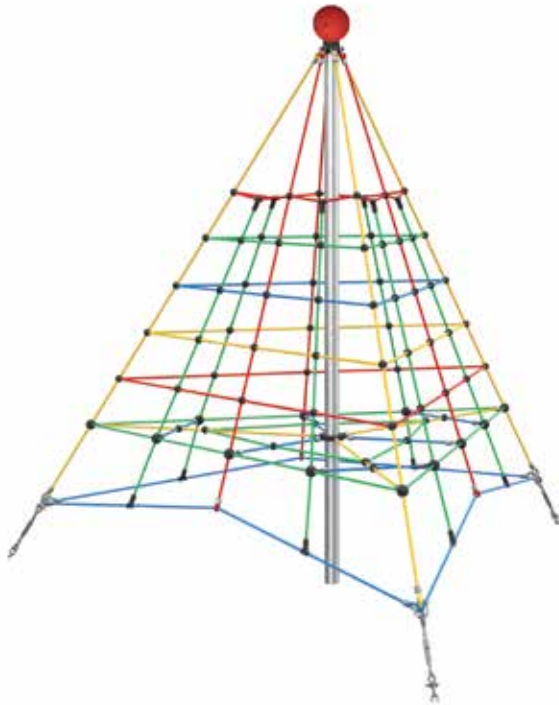

- For heavily used or vandalized playgrounds, a daily inspection may be required.
- Control logs are to be kept.
- The checks must be carried out by knowledgeable staff.
- If safety-critical serious defects are detected during an inspection, they must be remedied immediately. If this is not possible, the system must be excluded from use, e.g. by decommissioning or dismantling.
- If a piece of equipment needs to be removed, e.g. for maintenance or repair, all anchors or foundations remaining in the ground should be removed or covered with covers. The device should be locked for use.
- It has been shown that one post items can pose higher risks to their stability; the stability test should therefore be carried out at least twice a year.
- The strength of the screw connection must be checked no later than 14 days after installation. Loose connections need to be tightened.

---

## Attention!

The maintenance intervals mentioned above are to be understood as recommendations. The frequency of inspections has to be increased accordingly in case of intensive use of the equipment, extreme weather conditions, installations near the coast or in places which are often subject to vandalism and depending on the age of the equipment!

In addition to the maintenance recommendations given by the manufacturer, it is also absolutely necessary to follow the regulations stipulated in DIN EN 1176-7!

When exchanging or repairing elements, please always use original spare parts for the sake of operational safety and for liability reasons!

If the play equipment has been incompletely installed or partly dismantled when carrying out maintenance and repair work, this may lead to particular risks of injury for the user. For this reason, make clearly visible that the equipment shall not be used in such cases!

# Maintenance instructions for climbing equipment „pyramis 1“

Item No. 51 6525 401



In order to preserve a good visual appearance of your stilum playground equipment over a long period one should take care of maintenance of the stainless surface even despite of their corrosion resistance.

Especially areas, which can not be reached by rainfall should be frequently cleaned from dirt and deposits due to air pollution and dirt caused by the atmosphere.

Light soiling can easily be removed by using a high pressure cleaner.

For persistent deposits use a clean cloth moistened with a special liquid cleaner (e.g. on phosphoric acid) and rinse off with clear water after a short application time. During cleaning with mild abrasive components, only wipe over stainless steel surface in polishing direction.

For heavily soiled surfaces, polishes can be used (e.g. for cleaning chrome on cars) or for greasy and oily dirt alcoholic cleaning agents and solvents (e.g. ethyl alcohol, isopropyl alcohol or acetone).

However, it should be noted that the dissolved soiling is not spread over the surface again.

Do not use any chlorid or hydrochloric containing cleaning products nor scouring powder, bleaching - or silver polish cleaner. Cleaning intervals depend on type and degree of soiling as well as on demands made on optical characteristics.

Therefore cleaning is advisable at intervals of six to twelve months – whereby in the case of strong soiling it is appropriate to clean the playground equipment at intervals of three to six months.